





REFLEXCES
Custom Embedded Systems

Zeus Zynq® UltraScale+™ MPSoC SoM Carrier Board

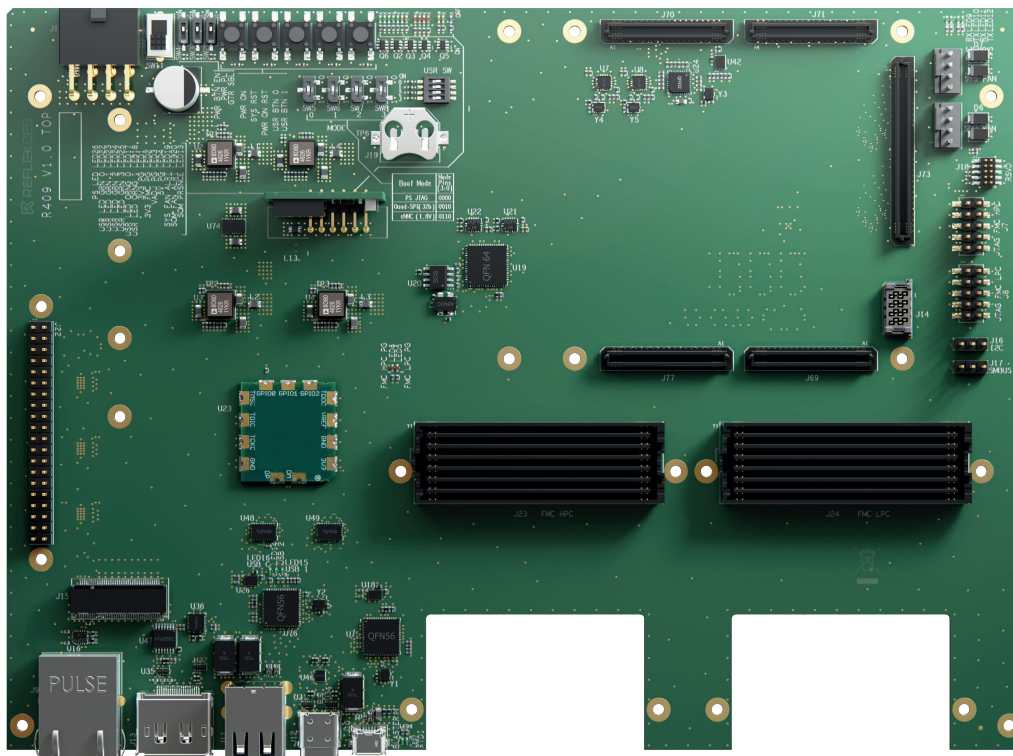

with Zeus Zynq® UltraScale+™ MPSoC module

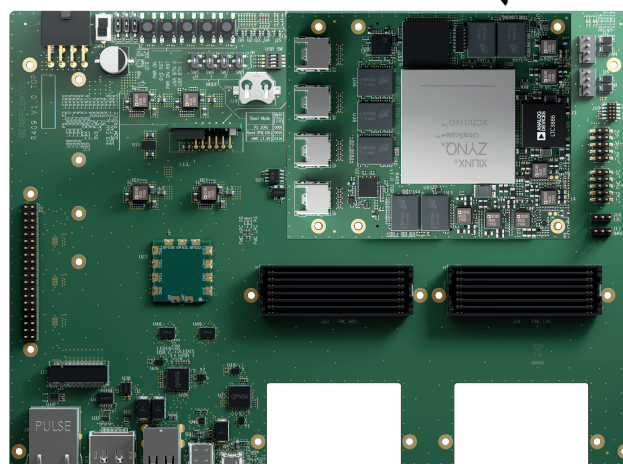

Target applications:

Software Defined Radio
Radar Systems
Electronic Warfare
High Precision Measurement

Contact :


Europe Sales Office
sales@reflexces.com

www.reflexces.com

North America Sales Office
salesusa@reflexces.com



Zeus Zynq® UltraScale+™ MPSoC SoM Carrier Board

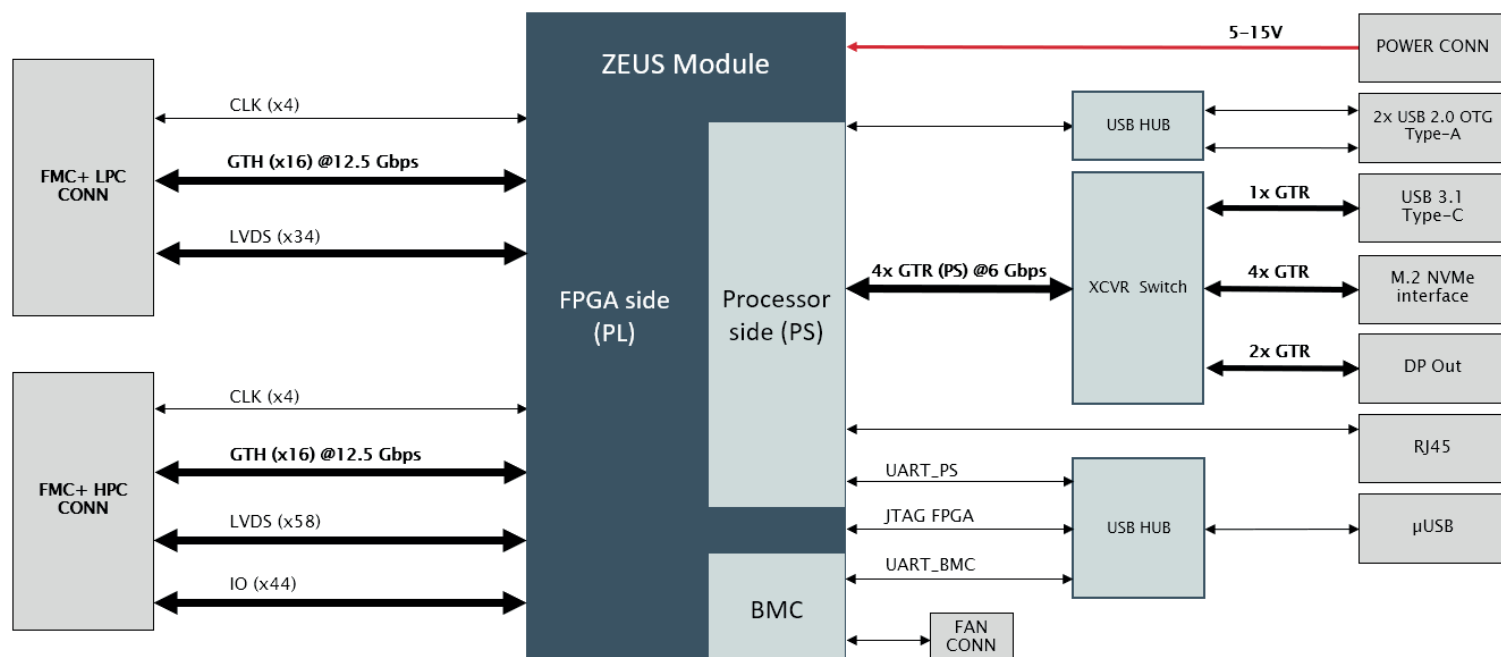

Full Specifications

Dual FMC+ connectors

- FMC+ HPC: 16 transceivers @12.5Gbps, 58x LVDS, 44x SE
- FMC+ LPC: 16 transceivers @12.5Gbps, 34x LVDS

PS Interfaces

- 1x GbE
- 2x USB2.0 OTG Type-A, USB3.1 Type-C, DP Out
- M.2 NVMe interface (M.2 NVMe drive not provided)

Misc.

- RTC battery holder
- On-board E2PROMS (BMC I2C, PS I2C)

Communication Interfaces

- FPGA= USB to JTAG
- BMC= USB to UART
- PS= USB to UART

Operating temperature : - 40°C / + 85°C
(except RTC battery)

Board dimensions : 170mm x 233.35mm

Compliance

- Fully compatible with Zeus Zynq® UltraScale+™ module
- RoHS/REACH compliant
- UL certified
- ISO9001 Facility

Deliverables

- Carrier board of the Zeus Zynq UltraScale+ MPSoC module
- Power supply and cables (US, UK, EU, JP)
- Interface cables (USB, Ethernet)
- PDF Documentation (Starter Guide, Reference Manual)
- Test designs (Vivado II project)
- Linux Kernel & Linaro optimized distribution, U-boot bootloader, Test scripts
- Mechanical drawings, 3D step, assembly files
- Carrier board schematics
- Carrier board Design Guide
- Online support at support.reflexces.com
- Zeus Zynq® UltraScale+™ MPSoC module is sold separately.
Ordering information : RXCZUP11EGPF42-SOM011

Ordering information

Part number = RXCZUP-CBD0SA